



OPTION 1: MALE-FEMALE INTERCONNECT

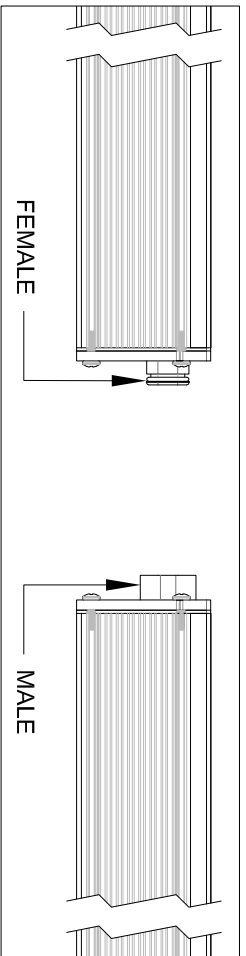


CONNECT MALE AND FEMALE ENDCAPS IN ORDER SHOWN ON JOB SPECIFIC DRAWING

OPTION 2: MOLDED MALE-FEMALE TWIST LOCK JUMPER

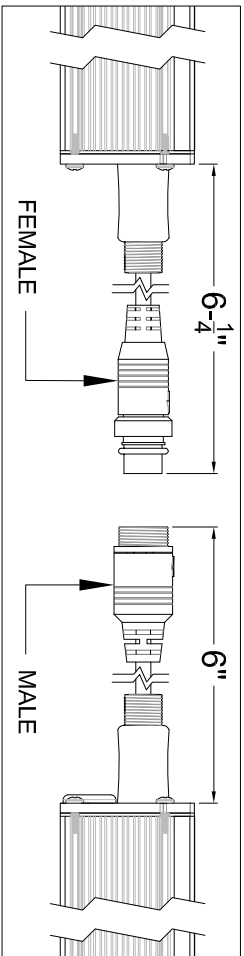

NOTE: SEE DETAIL FOR PROPER CONNECTION


OPTION 3: FACTORY INSTALLED 3" JUMPER

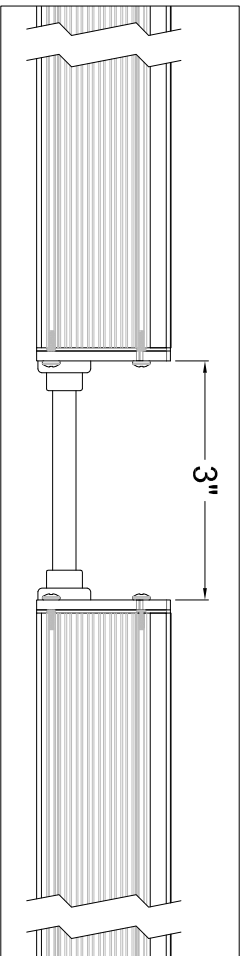

JUMPER ASSEMBLY IS PERMANENTLY INSTALLED, ON-SITE DISCONNECTION IS NOT POSSIBLE

NOTE: THIS DRAWING ONLY SHOWS THE VARIOUS CONNECTIONS POSSIBLE FOR THE HPNLS FAMILY, REFER TO THE JOB SPECIFIC DRAWINGS FOR THE CONNECTIONS THAT ARE BEING USED.

DETAIL:

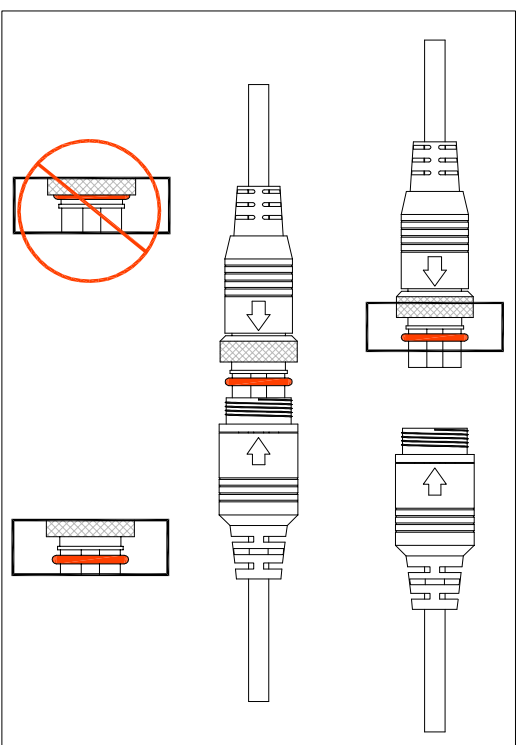

NOTE: MAKE SURE O-RING IS VISIBLE BEFORE INTERCONNECTING

END CAP CONDITIONS

FEMALE	MALE
FEMALE TWIST-LOCK	MALE TWIST-LOCK

HPNLS - HO

<p>BOCA FLASHER</p> <p>www.bocaflasher.com</p> <p>552 N.W. 77TH ST BOCA RATON, FL 33487 (561) 989-5338</p>	<p>THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.</p> <p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. TOLERANCES: ANGLES: ±.XX° LINEAR: X.XX ± 0.050 X.XX ± 0.075 X.XXX ± 0.005</p>	
	<p>FILE NAME: CONNECTIONS SHEET</p> <p>DRAWN BY: DEMILLER FILLINGER</p> <p>DESIGN BY: LUIS ROSADO</p> <p>APPROVED BY: ANGELA TODD</p> <p>SCALE: NTS</p>	<p>PART #: HPNLS-HO</p> <p>SHEET: 1 OF 1</p>