

PRODUCT EQUALS EXACTLY 12.00" WHEN CONNECTED WITH ANOTHER STRIP.


- OPTIONS:
1. COLORS OF RED, ORANGE, AMBER, GREEN, BLUE, AND WHITE (3K, 5K, OR 8K COLOR TEMPERATURES)
  2. SAND-BLASTING THE LEDS
  3. 12" OR 6" LENGTHS AVAILABLE FOR RED, ORANGE, AND AMBER
  4. 12", 8", OR 4" LENGTHS AVAILABLE FOR GREEN, BLUE, AND WHITE
  5. CONFORMAL COATING OF STRIP FOR WATER RESISTANCE
  6. POLYCARBONATE TUBING CUT TO LENGTH TO HOUSE PRODUCT.

ACCESSORIES:  
 MALE TO FEMALE CABLES (BF-CABL2-MFXX) TO JUMPER BETWEEN STRIP,  
 FEMALE TO FEMALE CABLES (BF-CABL2-FFXX) TO CONNECT BETWEEN POWER RUN OF STRIP AND DISTRIBUTION SYSTEM.

INPUT VOLTAGE: 24VAC OR 24VDC  
 INPUT CURRENT: 100mA  
 MAXIMUM OF 40FT OF PRODUCT PER POWER RUN.

**BOCA FLASHER**  
 552 N.W. 77TH ST  
 BOCA RATON, FL 33487  
 (561) 989-5338

DRAWN BY: LAURA GLASER  
 AC LIGHT STRIP  
 BF-AC10X1  
 SCALE 2:1 1/5/05 SHEET 1 OF 1 REV A

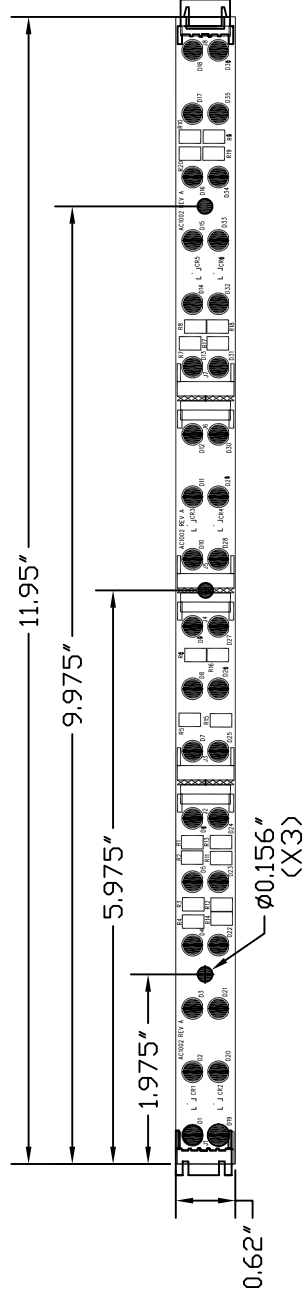

**OPTIONS:**

1. COLORS OF RED, ORANGE, AMBER, GREEN, BLUE, AND WHITE (3K, 5K, OR 8K COLOR TEMPERATURES)
2. SAND-BLASTING THE LEDS
3. 12" OR 6" LENGTHS AVAILABLE FOR RED, ORANGE, AND AMBER
4. 12", 8", OR 4" LENGTHS AVAILABLE FOR GREEN, BLUE, AND WHITE
5. CONFORMAL COATING OF STRIP FOR WATER RESISTANCE
6. POLYCARBONATE TUBING CUT TO LENGTH TO HOUSE PRODUCT.

**ACCESSORIES:**  
 MALE TO FEMALE CABLES (BF-CABL2-MFXX) TO JUMPER BETWEEN STRIP.  
 FEMALE TO FEMALE CABLES (BF-CABL2-FFXX) TO CONNECT BETWEEN POWER RUN OF STRIP AND DISTRIBUTION SYSTEM.

INPUT VOLTAGE: 24VAC OR 24VDC  
 INPUT CURRENT: 200mA  
 MAXIMUM OF 20FT OF PRODUCT PER POWER RUN.

NOTE: THIS DOCUMENT IS PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.

	DRAWN BY: LAURA GLASER	
	AC DOUBLE ROW LIGHT STRIP BF-AC1002	
552 N.W. 77TH ST BOCA RATON, FL 33487	SCALE 2:1	SHEET 1 OF 1
(561) 989-5338		REV A