


NOTE:
WHEN CONNECTED OVERALL LENGTH IS 1.50".

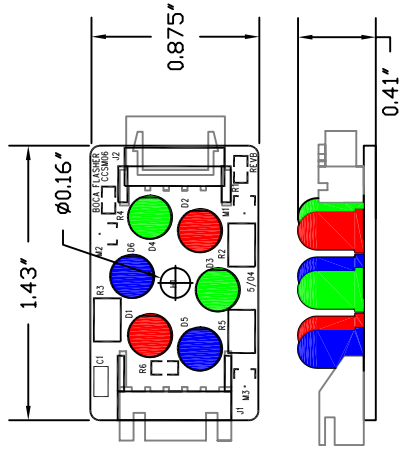


OPTIONS:

1. STANDARD COLORS ARE RED, GREEN, AND BLUE (AS SHOWN), OR AMBER, WHITE 5K, AND WHITE 5K. ANY THREE CUSTOM COLOR COMBINATIONS ARE AVAILABLE
2. CONFORMAL COATING FOR WATER RESISTANCE
3. 120DEG LEADS ALSO AVAILABLE
4. SANDBLASTED THE LEADS

INPUT VOLTAGE = 12VDC
 INPUT CURRENT = 100mA (max.)
 ONE CENTRAL MOUNTING HOLE AT 0.156" DIAMETER
 26 PIECES MAXIMUM PER HOME RUN CABLE

ACCESSORIES:

- MALE TO FEMALE CABLES (BF-CABL2-MFXX) TO JUMPER BETWEEN MODULES.
- FEMALE TO FEMALE CABLES (BF-CABL2-FFXX) TO CONNECT BETWEEN POWER RUN OF MODULES AND DISTRIBUTION SYSTEM.
- ADHESIVE MOUNTING POST (BF-MB0001)



552 N.W. 77TH ST
 BOCA RATON, FL 33487

(561) 989-5338

DRAWN BY: LAURA GLASER

COLOR CHANGING SIGN
 MODULE

BF-CCSM06

SCALE 1:1



2/1/05

SHEET 1 OF 1

REV B

NOTE: THIS DOCUMENT IS PROTECTED BY
 COPYRIGHTS OF BOCA FLASHER INC.

NOTE:
WHEN CONNECTED OVERALL LENGTH IS 1.50".

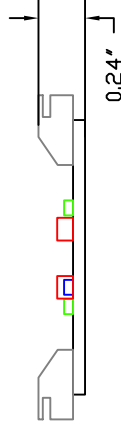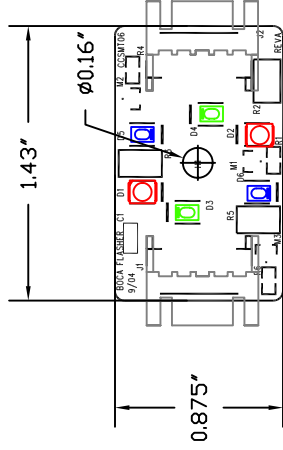


OPTIONS:

1. STANDARD COLORS ARE RED, GREEN, AND BLUE (AS SHOWN), OR AMBER, WHITE SK, AND WHITE SK. ANY THREE CUSTOM COLOR COMBINATIONS ARE AVAILABLE
2. CONFORMAL COATING FOR WATER RESISTANCE
3. 30 DEG OR 120DEG LEDS (120DEG SHOWN)

INPUT VOLTAGE = 12VDC
 INPUT CURRENT = 100mA (max.)
 ONE CENTRAL MOUNTING HOLE AT 0.156" DIAMETER
 26 PIECES MAXIMUM PER HOME RUN CABLE

ACCESSORIES:

- FEMALE TO FEMALE CABLES (BF-CABL3-FFXX) TO JUMPER BETWEEN MODULES.
- FEMALE TO FEMALE CABLES (BF-CABL23-FFXX) TO CONNECT BETWEEN POWER RUN OF MODULES AND DISTRIBUTION SYSTEM.
- ADHESIVE MOUNTING POST (BF-MB0001)

	DRAWN BY: LAURA GLASER	
	COLOR CHANGING SIGN MODULE, WIDE ANGLE BF-CCSMT06	
552 N.W. 77TH ST BOCA RATON, FL 33487	SCALE 1:1	SHEET 1 OF 1
(561) 989-5338		REV A