


OPTIONS:

1. COLORS OF RED, ORANGE, AMBER, GREEN, BLUE, AND WHITE (3K, 5K, OR 8K COLOR TEMPERATURES)
2. SAND-BLASTING THE LEDS
3. 12" 8", OR 4" LENGTHS AVAILABLE FOR RED, ORANGE, AND AMBER
4. 12", OR 6" LENGTHS AVAILABLE FOR GREEN, BLUE, AND WHITE
5. CONFORMAL COATING OF STRIP FOR WATER RESISTANCE
6. POLYCARBONATE TUBING CUT TO LENGTH TO HOUSE PRODUCT.

ACCESSORIES:
 MALE TO FEMALE CABLES (BF-CABL2-MFXX) TO JUMPER BETWEEN STRIP.
 FEMALE TO FEMALE CABLES (BF-CABL2-FFXX) TO CONNECT BETWEEN POWER RUN OF STRIP AND DISTRIBUTION SYSTEM.

INPUT VOLTAGE: 24VRAC OR 24VDC
 INPUT CURRENT: 100mA
 MAXIMUM OF 26FT OF PRODUCT PER POWER RUN.
 4 MOUNTING HOLES PER FOOT

NOTE: THIS DOCUMENT IS PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.




552 N.W. 77TH ST
 BOCA RATON, FL 33487

(561) 989-5338

DRAWN BY: LAURA GLASER

DIMMABLE LIGHT STRIP FOR
 BLUE, GREEN, OR WHITE
 BF-DLS10X1-24X-X

SCALE 1:2 SHEET 1 OF 1 REV A

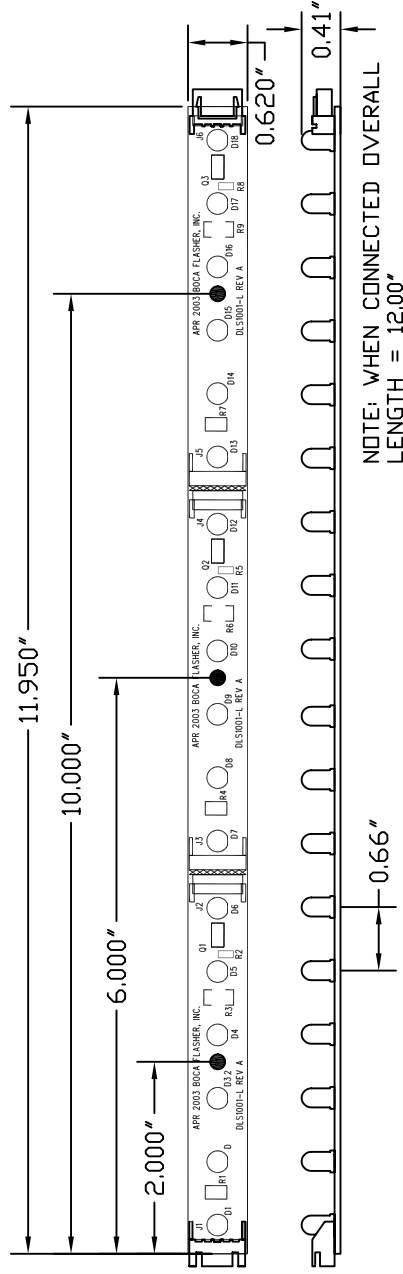

NOTE: WHEN CONNECTED OVERALL LENGTH = 12.00"


OPTIONS:

1. COLORS OF RED, ORANGE, AMBER, GREEN, BLUE, AND WHITE (3K, 5K, OR 8K COLOR TEMPERATURES)
2. SAND-BLASTING THE LEDS
3. 12" 8", OR 4" LENGTHS AVAILABLE FOR RED, ORANGE, AND AMBER
4. 12", OR 6" LENGTHS AVAILABLE FOR GREEN, BLUE, AND WHITE
5. CONFORMAL COATING OF STRIP FOR WATER RESISTANCE
6. POLYCARBONATE TUBING CUT TO LENGTH TO HOUSE PRODUCT.

ACCESSORIES:
 MALE TO FEMALE CABLES (BF-CABL2-MFXX) TO JUMPER BETWEEN STRIP.
 FEMALE TO FEMALE CABLES (BF-CABL2-FFXX) TO CONNECT BETWEEN POWER RUN OF STRIP AND DISTRIBUTION SYSTEM.

INPUT VOLTAGE: 24VRAC OR 24VDC
 INPUT CURRENT: 100mA
 MAXIMUM OF 26FT OF PRODUCT PER POWER RUN.
 4 MOUNTING HOLES PER FOOT

NOTE: THIS DOCUMENT IS PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.



552 N.W. 77TH ST
 BOCA RATON, FL 33487

(561) 989-5338

DRAWN BY: LAURA GLASER

DIMMABLE LIGHT STRIP FOR
 RED, ORANGE, OR AMBER
 BF-DLS10X1-24D-X

SCALE 1:2

1/10/05

SHEET 1 OF 1

REV A