

## Task


### Shallow Profile LED Fixture

Dimmable monochromatic low voltage fixture for use as a task light.

The Boca Task is a shallow profile fixture specifically designed for task areas where space and energy consumption are constrained. Boca's patented Clean Dim\* technology ensures even dimming from 0-100%. The Task features a diffused lens that widens the light distribution across work surfaces in all directions and softens the overlapping shadows that can be a problem with other fixtures. It is offered with vacancy / occupancy sensors to ensure energy is not unnecessarily wasted. It can be fabricated with a range of color temperature choices, affording a multitude of options. The housing is anodized aluminum with a durable finish making it weather and abrasion resistant.

### Technical Specifications

Wattage .....	7.5 watts per linear ft.
Input Voltage .....	90-120 VAC
Input Current .....	Model dependent
Control .....	Integral dimmer
	..... Vacancy / Occupancy sensor standard
Driver Type .....	Constant Current Power
LED Spacing, per strip .....	2", on center
Fixture Length .....	6" increments
	.....allow 1/4" for each end cap and 1" for power feed cable
Fixture Width .....	3.03"
Total Height (not including clip) .....	0.85"
Mounting .....	Fixed metal plate with magnetic backing
Color Options .....	2700K, 3000K, 3500K, 4000K, 5000K, amber, red, green, blue
Optics available .....	120° with diffused lens
Color Rendering Index (CRI) .....	85 CRI

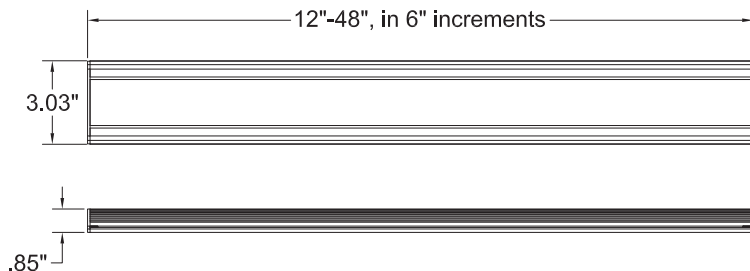

PROJECT: \_\_\_\_\_


TYPE: \_\_\_\_\_



### Key Features


- Magnetic mounting makes installation easy.
- Individual fixtures can dim separately to suit end users, and dimmed setting remains fixed even if fixture turns off.
- Vacancy / occupancy sensors ensure fixture is energy efficient. User can select either vacancy or occupancy on sensor.
- Sensor comes in three optics for a variety of sensitivity - 10°, 90°, 180°
- Many options in color temperature to suit a range of projects .
- Fixture comes with diffused lens standard - Contact Factory for more options
- Uses standard Edison base plug, other options available upon request.
- Clean Light option allows temporary light output boost.
- Interior installations only

### Mounting Options



Magnetic Plate attaches to bottom.  
Call Factory for more instructions.

### Project Specification

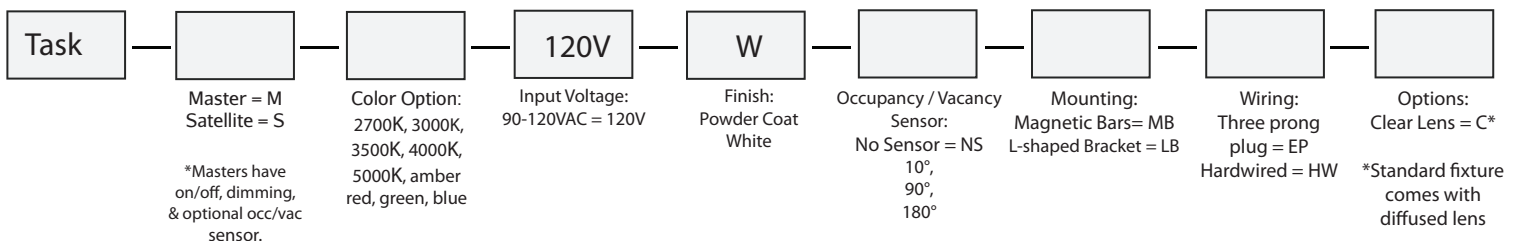

We are constantly improving our fixtures and reserve the right to change options and specifications. Additional information & details at [www.bocaflasher.com](http://www.bocaflasher.com).  
For specific requirements, contact your Boca sales representative.

Boca Flasher, Inc. 552 NW 77th Street Boca Raton, Florida 33487 USA Phone: 561.989.5338 Fax: 561.982.8323  
© 2011 Boca Flasher, Inc. All rights reserved. All names and trademarks are property of their respective owners REV 040512

